



SNOWSTRIKER™

V-PLOW AND STRAIGHT-BLADE



MADE IN FINLAND

165-240 cm • For pickups, light trucks and UTV's • Trip edge in two segments • Down-pressure • Hilltip Quick Hitch

STRAIGHT-BLADE



PLOW APPLICATIONS

This is the first plow of its kind built in Europe - and **built for European vehicles**. The Hilltip Quick Hitch mounts makes this easy on-and-off snow-plow compatible with most pickups and SUVs on the market.

PLOW DESIGN

The curved, powder-coated blade is made of **high-strength steel**, which in this case is the key to our durable but **light plow**. The adjustable two-segment cutting edge is available in polyurethane or high-strength steel.



Scoop position



V-position



Straight-blade



Windrow-left


V-PLOW



Cutting edge with trip springs



Quick hitch - lift shoe handle to attach your plow to the vehicle.

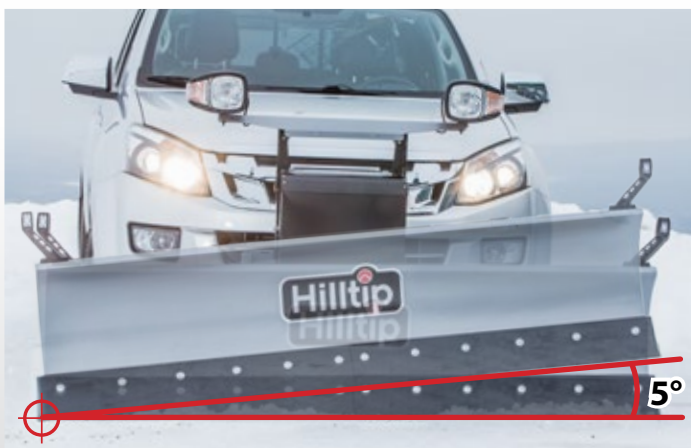

5° tilt angle



Joystick

STANDARD FUNCTIONS

- ✓ Cutting edge in two segments with trip springs protects the plow and vehicle when striking curbs or other obstacles. The trip springs on one side of the cutting edge will be compressed when hitting an obstacle, while the other cutting edge segment stays on the ground.
- ✓ Adjustable attacking angle.
- ✓ Down-pressure function presses the plow down for a cleaner scrape.
- ✓ High performance 12V power unit inside enclosed housing.
- ✓ Light tower with LED headlights.
- ✓ LED edge-markers.
- ✓ Curved blade for optimal snow-rolling effect.
- ✓ Hilltip Quick Hitch mounting system - fast and easy plow-attachment to car, with all-in-one electrical plug.
- ✓ Blade tilts and oscillates while plowing on uneven ground for a cleaner scrape (5°)
- ✓ Self-diagnostic in-cabin joystick
- ✓ Direct cylinder lift

OPTIONAL FEATURES

- + Color-options: orange snowplow
- + Online data-logging with Hilltip HTrack™
- + Snow deflector
 - **V-plow:** poly-deflector
 - **Straight-blade:** rounded steel-deflector increases straight-blade height with 5 cm



Optional snow deflector in steel (straight-blade)

STRAIGHT-BLADE SPECIFICATIONS

MODEL	1650-SP	1850-SP	2100-SP	2250-SP	2400-SP
Width	165 cm	185 cm	210 cm	225 cm	240 cm
Width (fully angled)	140 cm	160 cm	185 cm	200 cm	215 cm
Height	55 cm	55 cm	55 cm	55 cm	55 cm
Weight	128 kg	135 kg	140 kg	145 kg	160 kg
Trip springs	4	6	6	6	8

V-PLOW SPECIFICATIONS

MODEL	1650-VP	1850-VP	2100-VP	2250-VP	2400-VP
Width	165 cm	185 cm	210 cm	225 cm	240 cm
Width (fully angled)	145 cm	160 cm	185 cm	200 cm	215 cm
Height	63 cm	65,5 cm	67 cm	68 cm	70 cm
Weight	135 kg	142 kg	149 kg	155 kg	168 kg
Trip springs	6	6	6	6	8



HillTip Oy Ab

Pukkisaarentie 6
FIN-68600 Pietarsaari
Finland

+358 (0) 505983026

+358 (0) 503659415

www.hilltip.com

info@hilltip.com

[facebook.com/hilltip](https://www.facebook.com/hilltip)

[youtube.com/hilltip](https://www.youtube.com/hilltip)